



LGR155 Dehumidifier For Flood Damage

The Preair LGR155 dehumidifier is designed for restoration. Damaged by typhoons, hurricanes, floods, or rainstorms, the houses or buildings are in the need of restoration. During the process of rebuilding or fixing, the professional dehumidifier plays an important role that can help deduce the relative humidity and create an appropriate construction environment. Preair is a specialist in manufacturing dehumidifiers for water damage restoration. With several advantages, the dehumidification effect of the [LGR155 dehumidifier for flood damage](#) can surprise you.





Specifications of LGR155 Flood Dehumidifier

NO.	LGR155
Power Supply	115V/60Hz
Rated Current (A)	10
Rated Power (W)	1154
Dehumidification Capacity	240 PPD/Day (30°C/80%RH) 155 PPD/Day (26.7°C/60%RH) 25 PPD/Day (40°C/20%RH) 300 PPD/Day (32°C/90%RH)
Operating Temperature Range	41°F -100.4°F
Operating Humidity Range	20%RH-90%RH
Body Size	615*425*470mm 24.2*16.7*18.5inch
Packaging Dimensions	720*490*546 28.3*19.3*20.7
Net Weight	40.5kg 89.3 lbs
Refrigerant	R410A/20.1oz
Housing	Water pump
Display Panel	LCD liquid crystal
20GP / 40GP / 40HQ	140*365*292
Filter	SUS304
Drain Pipe Length	6M



Structure of LGR155 Dehumidifier After Flood

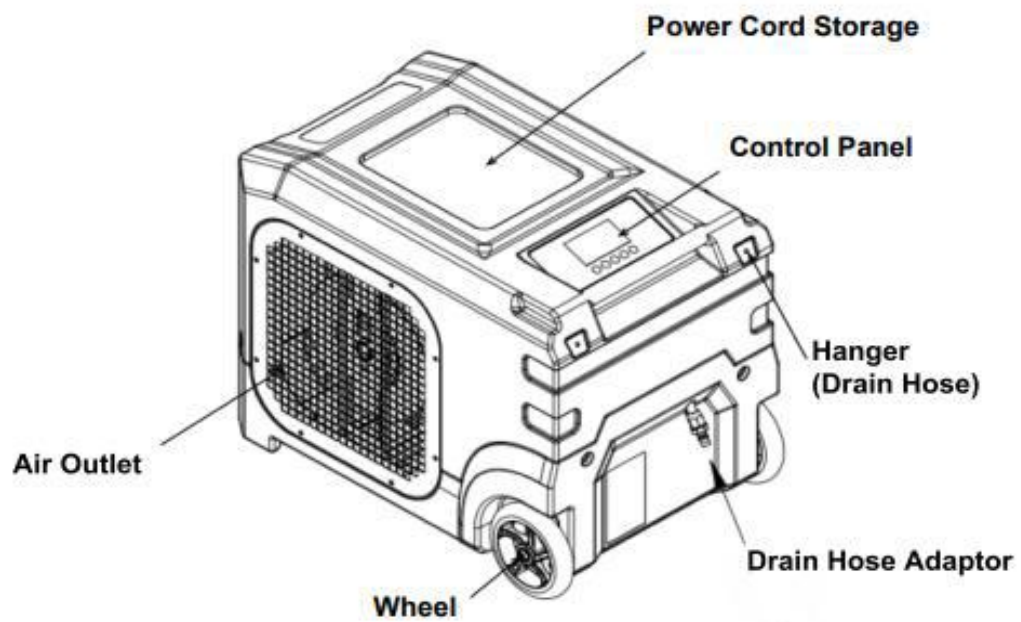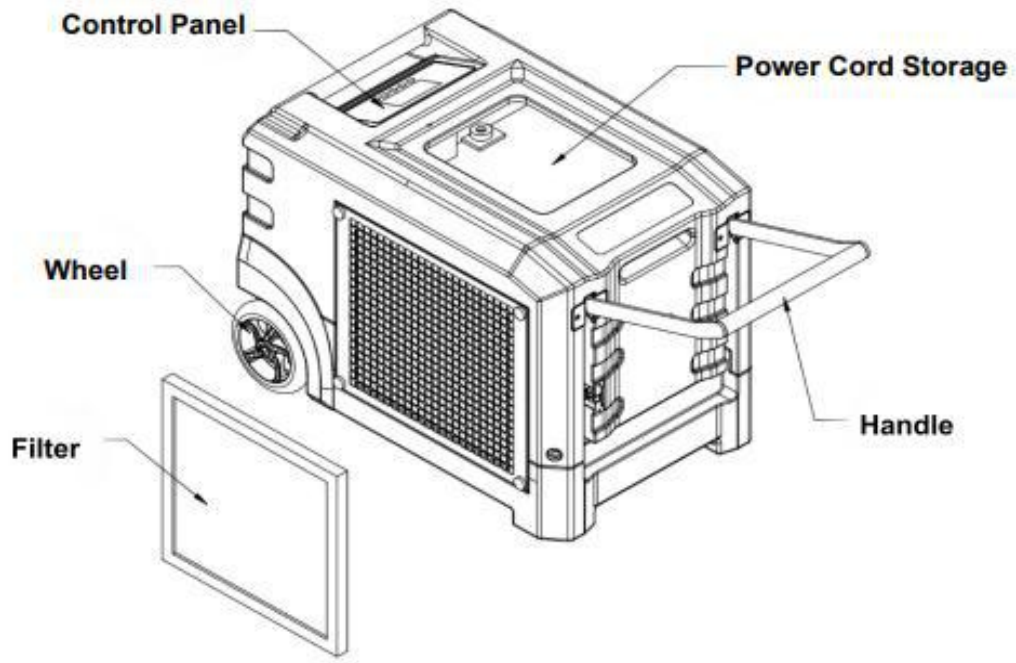



Applications of LGR155 Dehumidifier

